

INTRODUCING THE **WZ400** ZERO TURN FLEX DECK MOWER

FEATURES

- THREE 21" FLEX DECKS
- HUGS ROLLING TERRAIN
- PUSH MOWER ACCURACY
- ELIMINATES SCALPING
- FULLY WELDED FRAME
W/ LIFETIME WARRANTY



61" CUTTING WIDTH 26.5HP EFI GASOLINE

ENGINE

Type	KOHLER® Command PRO® EFI ECH749 Gasoline, OHV, (closed loop EFI system)
Emissions Level	0=EPA Phase III, 1=CARB Phase III, 2=EU Stage V
Rated Horsepower	26.5hp (747cc) (19.8kw) (SAE J1995)
Displacement	45.0 cu. in.
Air Cleaner	High-efficiency, heavy-duty canister air filtration system
Cooling System Type	Air cooled
Alternator Capacity	12V
Oil System Type	Full pressure w/full-flow filter
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

CUTTING DECK SYSTEM

Cut Width	61" (154.9 cm)
Blades	Three 21" High Lift
Deck Segments	Three 21" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	4.44 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- wheel, 5" dia. anti-scalp w/ zerk
Blade Tip Speed	18,500 FPM (approximate)


TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air

Featuring a **61" cutting width**, **three 21" flex decks**, and **zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the **accuracy of three small push mowers** at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion for superior cut quality** in even the most challenging contours and valleys. Lastec's flex decks allow you to **approach contours from any angle without turf damage or scalping caused by traditional fixed decks**. The WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, **Lastec's patented belt-driven decks require minimal maintenance** and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

12° of articulation
up/down for
each flex deck

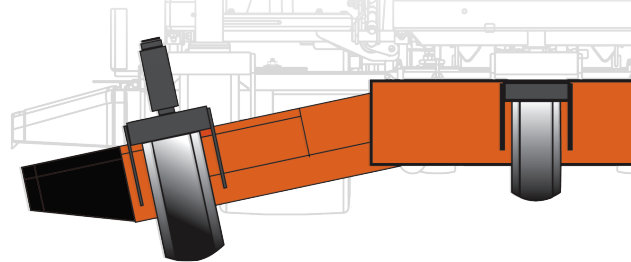

UP TO 4.44 ACRES PER HOUR

Average speed of 8 mph, assumed 10% overlap and no stops

DIMENSIONS & WEIGHT

Length	85" (2.16m)
Width	(mowing) 75"
Width	(transport) 69"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,459lbs



800.515.6798



lastec.com

INTRODUCING THE **WZ400** ZERO TURN FLEX DECK MOWER

FEATURES

- **THREE 21" FLEX DECKS**
- **HUGS ROLLING TERRAIN**
- **PUSH MOWER ACCURACY**
- **ELIMINATES SCALPING**
- **FULLY WELDED FRAME**
W/ LIFETIME WARRANTY



73" CUTTING WIDTH 35HP CARBURETED


Featuring a **73" cutting width**, **three 25" flex decks**, and **zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the **accuracy of three small push mowers** at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion for superior cut quality** in even the most challenging contours and valleys. Lastec's flex decks allow you to **approach contours from any angle without turf damage or scalping caused by traditional fixed decks**. The WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, **Lastec's patented belt-driven decks require minimal maintenance** and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

ENGINE

Type	KOHLER® Command PRO® CH980 Gasoline, OHV
Emissions Level	EPA Phase III
Rated Horsepower	35hp (999cc) (26.1KW) (SAE J1995)
Displacement	61.0 cu. In.
Air Cleaner	High-efficiency, heavy-duty canister air filtration system
Cooling System Type	Air cooled
Alternator Capacity	12V
Oil System Type	Full pressure w/full-flow filter
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

12° of articulation
up/down for
each flex deck

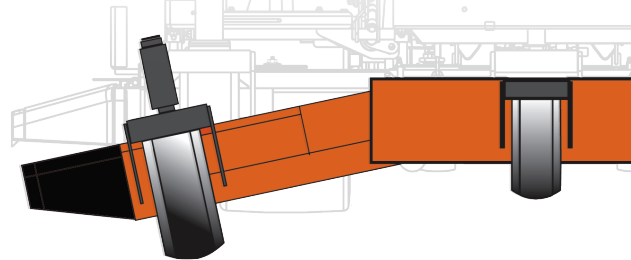

UP TO **5.31** ACRES PER HOUR

Average speed of 8 mph, assumed 10% overlap and no stops

CUTTING DECK SYSTEM

Cut Width	73" (185.4 cm)
Blades	Three 25" High Lift
Deck Segments	Three 25" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	5.31 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- wheel, 5" dia. anti-scalp w/ zerk
Blade Tip Speed	18,500 FPM (approximate)

DIMENSIONS & WEIGHT

Length	85" (2.16m)
Width	(mowing) 87"
Width	(transport) 81"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,598lbs

TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air



800.515.6798



lastec.com

INTRODUCING THE **WZ400** ZERO TURN FLEX DECK MOWER

FEATURES

- THREE 21" FLEX DECKS
- HUGS ROLLING TERRAIN
- PUSH MOWER ACCURACY
- ELIMINATES SCALPING
- FULLY WELDED FRAME
W/ LIFETIME WARRANTY



73" CUTTING WIDTH 38HP EFI

ENGINE

Type	KOHLER® Command PRO® EFI ECH980 Gasoline, OHV
Emissions Level	0=EU Stage V, 1=EPA Phase III
Rated Horsepower	38hp (999cc) (28.3kw) (SAE J1995)
Displacement	61.0 cu. in.
Air Cleaner	High-efficiency, heavy-duty canister air filtration system
Cooling System Type	Air cooled
Alternator Capacity	12V
Oil System Type	Full pressure w/full-flow filter
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks

CUTTING DECK SYSTEM

Cut Width	73" (185.4 cm)
Blades	Three 25" High Lift
Deck Segments	Three 25" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	5.31 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- wheel, 5" dia. anti-scalp w/ zerk
Blade Tip Speed	18,500 FPM (approximate)


TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air

Featuring a **73" cutting width**, **three 25" flex decks**, and **zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the **accuracy of three small push mowers** at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion for superior cut quality** in even the most challenging contours and valleys. Lastec's flex decks allow you to **approach contours from any angle without turf damage or scalping caused by traditional fixed decks**. The WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, **Lastec's patented belt-driven decks require minimal maintenance** and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

12° of articulation
up/down for
each flex deck

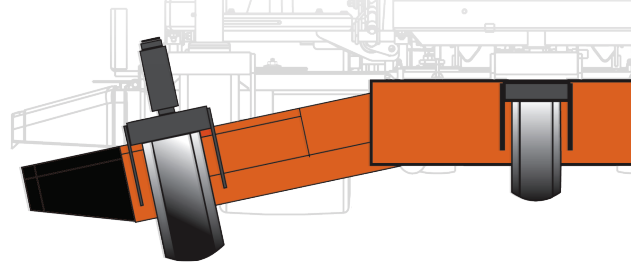

UP TO **5.31** ACRES PER HOUR

Average speed of 8 mph, assumed 10% overlap and no stops

DIMENSIONS & WEIGHT

Length	85" (2.16m)
Width	(mowing) 87"
Width	(transport) 81"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,598lbs



800.515.6798



lastec.com

INTRODUCING THE **WZ400** ZERO TURN FLEX DECK MOWER

FEATURES

- **THREE 21" FLEX DECKS**
- **HUGS ROLLING TERRAIN**
- **PUSH MOWER ACCURACY**
- **ELIMINATES SCALPING**
- **FULLY WELDED FRAME**
W/ LIFETIME WARRANTY



61" CUTTING WIDTH 25HP DIESEL

Featuring a **61" cutting width**, **three 21" flex decks**, and **zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the **accuracy of three small push mowers** at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion for superior cut quality** in even the most challenging contours and valleys. Lastec's flex decks allow you to **approach contours from any angle without turf damage or scalping caused by traditional fixed decks**. The WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, **Lastec's patented belt-driven decks require minimal maintenance** and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

ENGINE

Type	Kubota® D902-EF01 3-cylinder, Turbo diesel
Emissions Level	EPA/CARB Tier 4 final, EU stage V
Rated Horsepower	24.8hp (SAE J1995)
Displacement	898L/54.80 cu. in.
Air Cleaner	Heavy-Duty Canister Air Filtration System
Cooling System Type	Pressurized radiator, forced circulation with water pump
Alternator Capacity	12V, 60A
Oil System Type	Forced lubrication by trochoid pump
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks


CUTTING DECK SYSTEM

Cut Width	61" (154.9 cm)
Blades	Three 21" High Lift
Deck Segments	Three 21" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	4.44 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- wheel, 5" dia. anti-scalp w/ zerk
Blade Tip Speed	18,500 FPM (approximate)

TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air

12° of articulation
up/down for
each flex deck

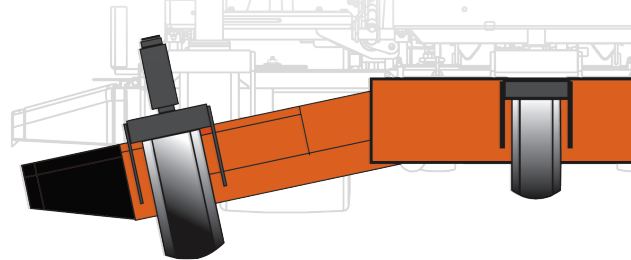

UP TO **4.44** ACRES PER HOUR

Average speed of 8 mph, assumed 10% overlap and no stops

DIMENSIONS & WEIGHT

Length	85" (2.16m)
Width	(mowing) 75"
Width	(transport) 69"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,513lbs



800.515.6798



lastec.com

INTRODUCING THE **WZ400** ZERO TURN FLEX DECK MOWER

FEATURES

- **THREE 21" FLEX DECKS**
- **HUGS ROLLING TERRAIN**
- **PUSH MOWER ACCURACY**
- **ELIMINATES SCALPING**
- **FULLY WELDED FRAME**
W/ LIFETIME WARRANTY



73" CUTTING WIDTH 25HP DIESEL

Featuring a **73" cutting width**, **three 25" flex decks**, and **zero turn maneuverability**, the Lastec WZ400 commercial zero turn mower cuts with the **accuracy of three small push mowers** at the speed and production of a commercial-grade zero turn mower. Built in the USA, the WZ400 offers several gas and diesel engine options to fit the production needs and budgets of commercial landscapers, lawn care professionals, and golf courses.

The WZ400 includes **three independently flexing decks with up to 12° of total up/down motion for superior cut quality** in even the most challenging contours and valleys. Lastec's flex decks allow you to **approach contours from any angle without turf damage or scalping caused by traditional fixed decks**. The WZ400 is built for speed, production, and accuracy in areas around buildings, landscaping, or other common areas that would normally require hand trimming. In addition, **Lastec's patented belt-driven decks require minimal maintenance** and provide unmatched fuel efficiency compared to hydraulically driven rotary mowers that often cost 50% more to own and operate.

ENGINE

Type	Kubota® D902-EF01 3-cylinder, Turbo diesel
Emissions Level	EPA/CARB Tier 4 final, EU stage V
Rated Horsepower	24.8hp (SAE J1995)
Displacement	898L/54.80 cu. in.
Air Cleaner	Heavy-Duty Canister Air Filtration System
Cooling System Type	Pressurized radiator, forced circulation with water pump
Alternator Capacity	12V, 60A
Oil System Type	Forced lubrication by trochoid pump
Oil Capacity	2.0 US qt. (1.9L)
Oil Filter Type	Full-flow, replaceable spin-on type
Fuel Capacity	12 gallons, dual 6 gallon (22.7 liter) self-leveling tanks


CUTTING DECK SYSTEM

Cut Width	73" (185.4 cm)
Blades	Three 25" High Lift
Deck Segments	Three 25" (533.4 mm) articulating, 5.5" deep, 7ga pans
Height of Cut Range	1.5" (38.1 mm) to 4.5" (114.3 mm)
Height Adjustment	15 position manual height adjustment
Acres per Hour	5.31 (assumes 10% overlap, no stops, and average speed of 8 mph)
Deck Caster Wheels	3- wheel, 5" dia. anti-scalp w/ zerk
Blade Tip Speed	18,500 FPM (approximate)

TRACTION SYSTEM

Max Forward Speed	Infinitely Variable - 10mph (16.09 km/h)
Max Reverse Speed	Infinitely Variable - 3mph (4.83 km/h)
Front Tires	Two 13 x 6.5-6, smooth, semi-solid
Rear Tires	Two 24X12X12, 6-PLY Grassmaster
Parking Brake	Lever actuated, 2 mechanical drum-type on rear wheels
Steering	Dual-lever hydrostatic differential type with rear wheels
Hydraulic Oil Filters	Full-flow, replaceable spin-on type
Hydraulic Oil Cooler	Pressurized, forced-air

12° of articulation
up/down for
each flex deck

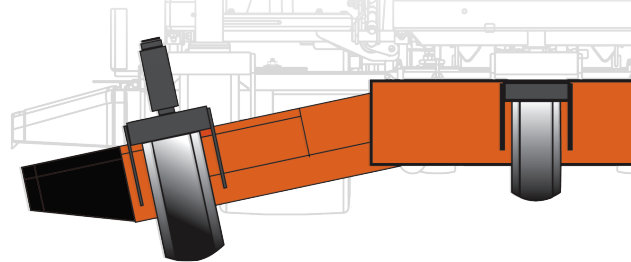

UP TO **5.31** ACRES PER HOUR

Average speed of 8 mph, assumed 10% overlap and no stops

DIMENSIONS & WEIGHT

Length	85" (2.16m)
Width	(mowing) 87"
Width	(transport) 81"
Height	(ROPS up) 68"
Height	(ROPS down) 50.5"
Wheelbase	48.25"
Rear Track	46.25"
Weight	1,652lbs



800.515.6798



lastec.com